

CURRENT TRANSFORMER

Model 3P92

Window Size

2.56" x 2.12"

Application:

3 phase relay, metering and motor overload protection.

Frequency:

50 - 400 Hz



Insulation Level:

600 Volts, 10 kv BIL full wave


- Terminals are brass studs No. 8 - 32 with one flat washer, lockwasher and regular nut.
- Flexible leads UL 1015 105°C., CSA approved
- #16 AWG, 24" long are available.
- Approximate weight: 7 lbs.



E228202

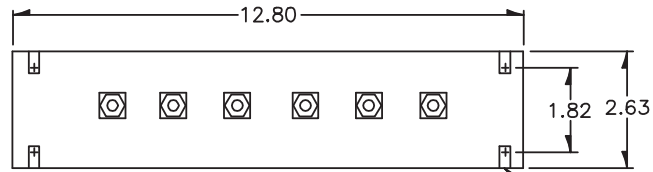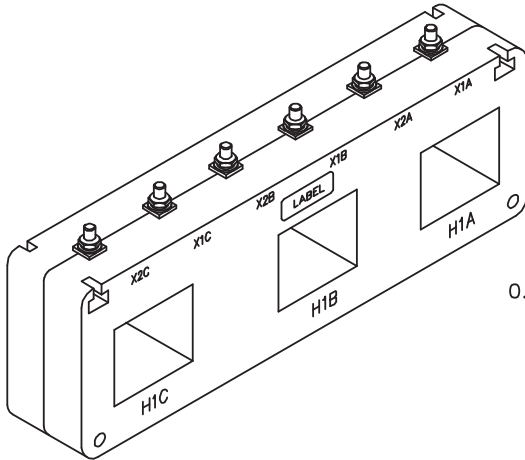


(4) CAPTIVE SLOTS FOR 0.25 NUT OR BOLT HD.

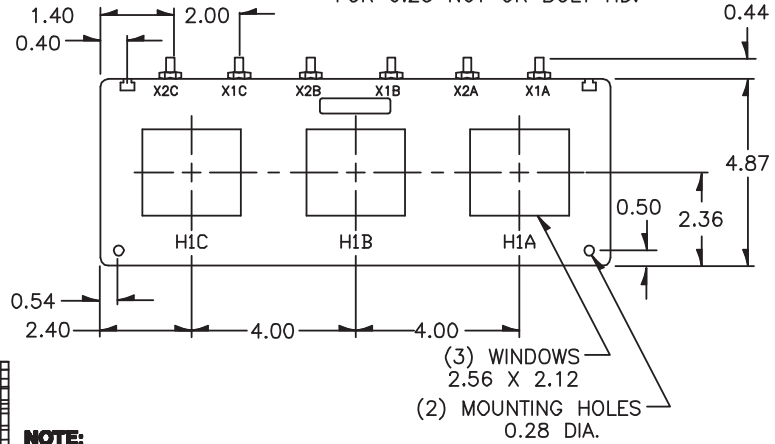

NOTE:

Captive slots on top of transformer case can be used for attaching auxiliary device mounting plate, (not supplied). If the application requires transformer mounted relays, etc., then transformer can be ordered with secondary leads configured in various ways (consult factory).

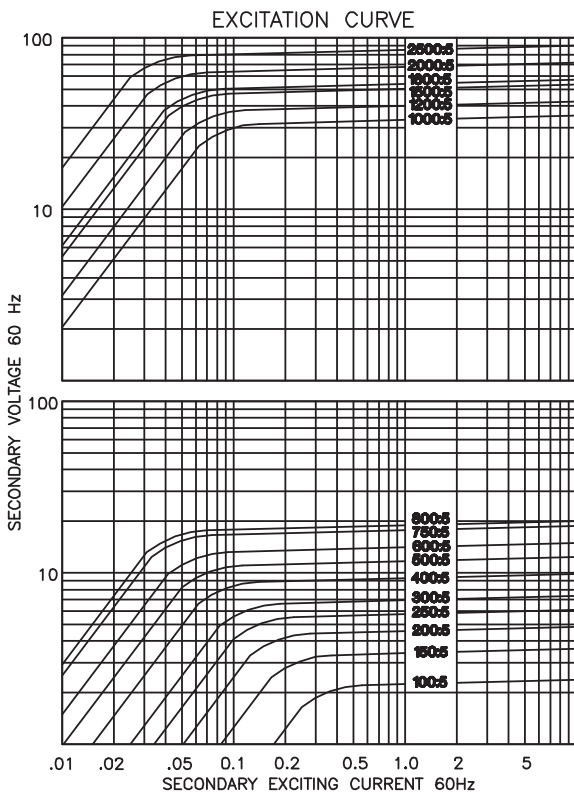

CATALOG NUMBER	CURRENT RATIO	VA FOR 1% CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)
			B0.1	B0.2	B0.5	B0.9	B1.8	
3P92-101	100 :5	2.5	2.4	2.4	4.8	-	-	0.012
3P92-151	150 :5	5	1.2	1.2	2.4	-	-	0.023
3P92-201	200 :5	5	0.6	0.6	2.4	4.8	-	0.036
3P92-251	250 :5	7.5	0.6	0.6	1.2	2.4	-	0.045
3P92-301	300 :5	10	0.6	0.6	1.2	2.4	-	0.054
3P92-401	400 :5	15	0.3	0.3	0.6	1.2	2.4	0.076
3P92-501	500 :5	20	0.3	0.3	0.3	0.6	1.2	0.095
3P92-601	600 :5	25	0.3	0.3	0.6	0.6	1.2	0.150
3P92-751	750 :5	25	0.3	0.3	0.3	0.6	1.2	0.187
3P92-801	800 :5	35	0.3	0.3	0.3	0.6	0.6	0.200
3P92-102	1000 :5	30	0.3	0.3	0.3	0.6	0.6	0.177
3P92-122	1200 :5	35	0.3	0.3	0.3	0.3	0.6	0.213
3P92-152	1500 :5	45	0.3	0.3	0.3	0.3	0.6	0.266
3P92-162	1600 :5	50	0.3	0.3	0.3	0.3	0.3	0.284
3P92-202	2000 :5	60	0.3	0.3	0.3	0.3	0.3	0.441
3P92-252	2500 :5	75	0.3	0.3	0.3	0.3	0.3	0.683