

CURRENT TRANSFORMER

Model 196

Window Diameter 1.25"

Application:
Relaying and metering

Frequency:
50 - 400 Hz

Insulation Level:
600 Volts, 10 kv BIL full wave



Continuous Thermal Current Rating Factor:
1.33 at 30°C amb., 1.0 at 55°C amb.

- Secondary terminals are No. 8 - 32 brass studs with one flatwasher, lockwasher and regular nut.


- Approximate weight: 6 lbs.



E228202

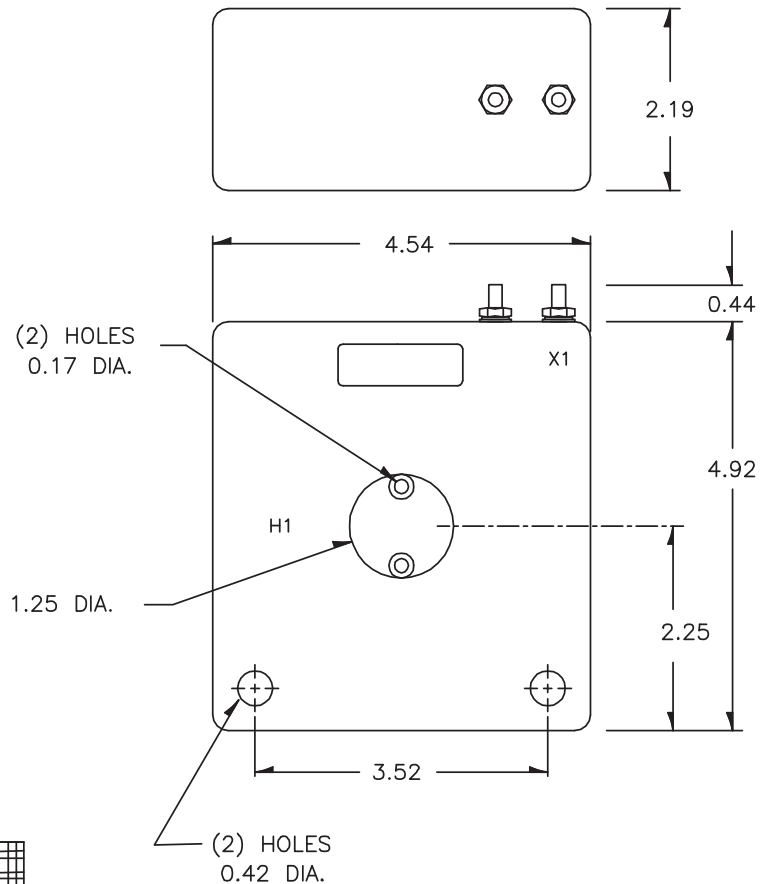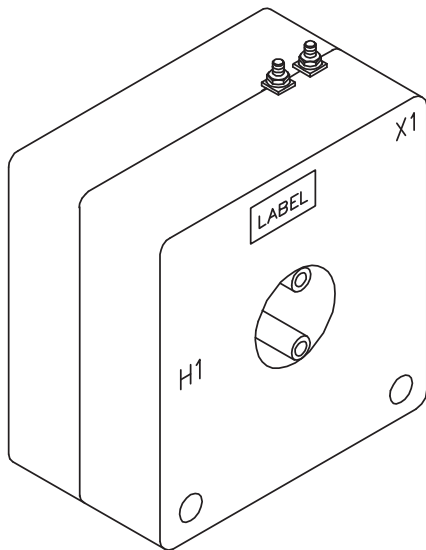

EXCITATION CURVE

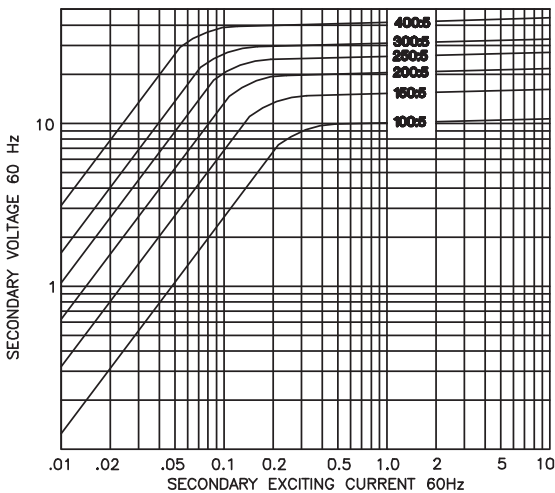

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75 °C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
196-101	100:5	-	0.6	1.2	-	-	-	0.037
196-151	150:5	C10	0.3	0.6	1.2	-	-	0.056
196-201	200:5	C10	0.3	0.3	0.6	1.2	2.4	0.075
196-251	250:5	C20	0.3	0.3	0.6	0.6	1.2	0.094
196-301	300:5	C20	0.3	0.3	0.3	0.6	0.6	0.112
196-401	400:5	C20	0.3	0.3	0.3	0.3	0.6	0.150