

CURRENT TRANSFORMER

Model 786

Window Diameter 6.5"

Application:
Relaying and metering

Frequency:
50 - 400 Hz

Insulation Level:
600 Volts, 10 kv BIL full wave




Continuous Thermal Current Rating Factor:
2.0 at 30°C amb., 1.5 at 55°C amb.

- Secondary terminals are No. 10 - 32 brass screws with one flatwasher, lockwasher and regular nut.

- Approximate weight: 58 lbs.




E228202

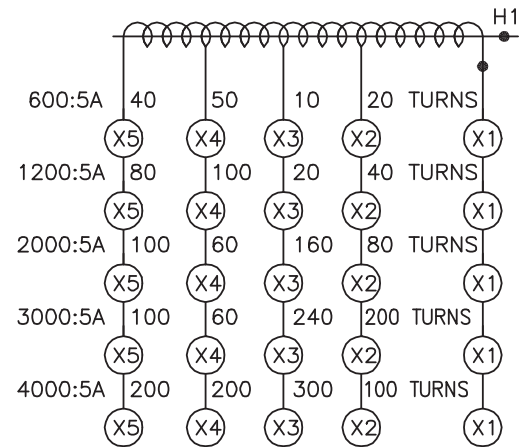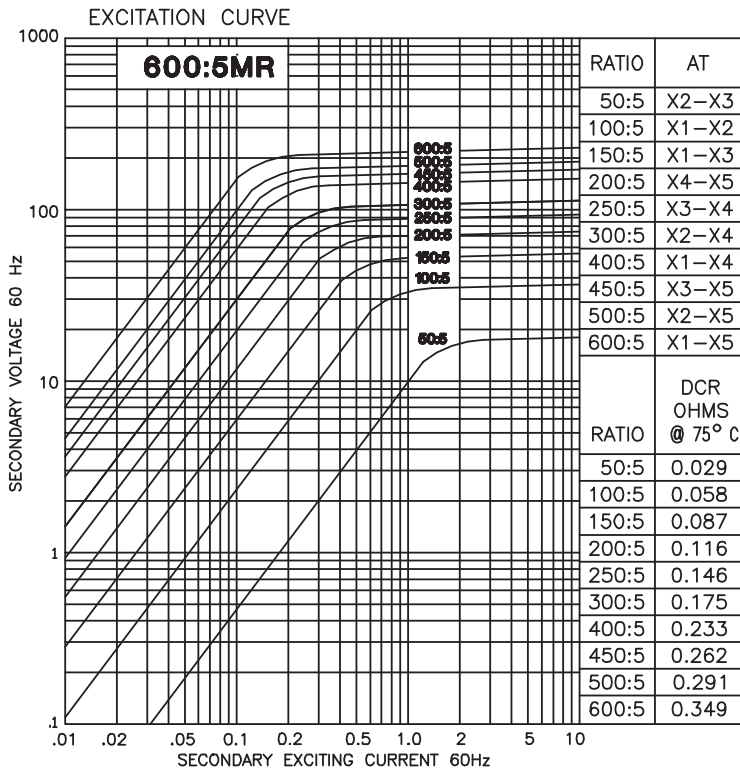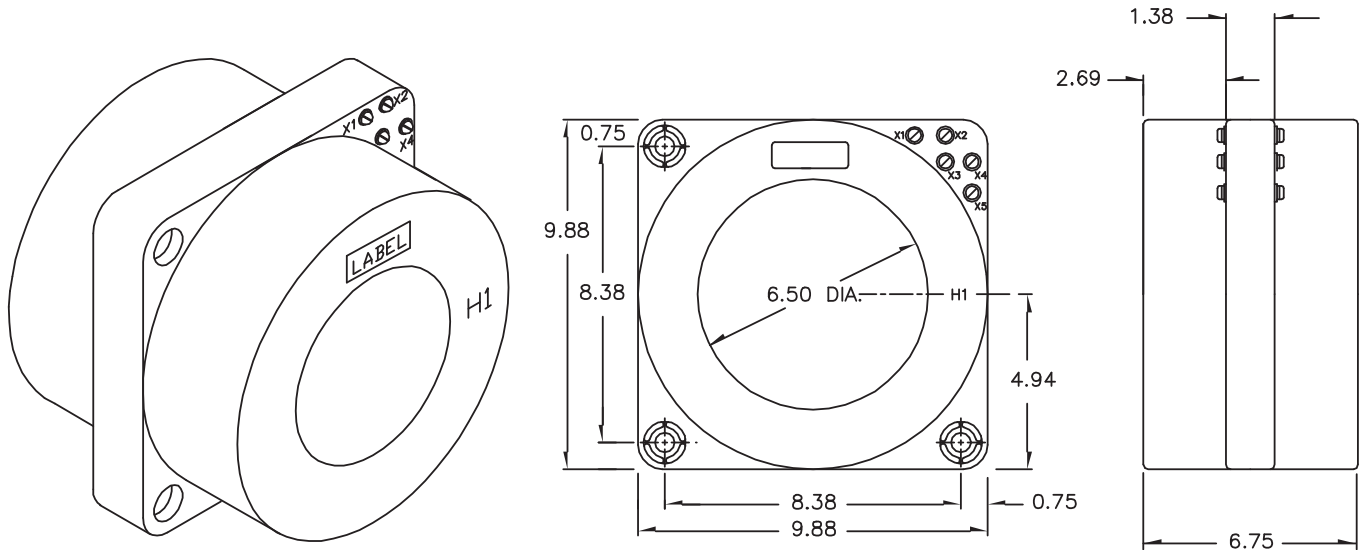


CONNECTION DIAGRAM

MODEL 786 - 601MR - rating C200


Typical Excitation Curves - Model 786

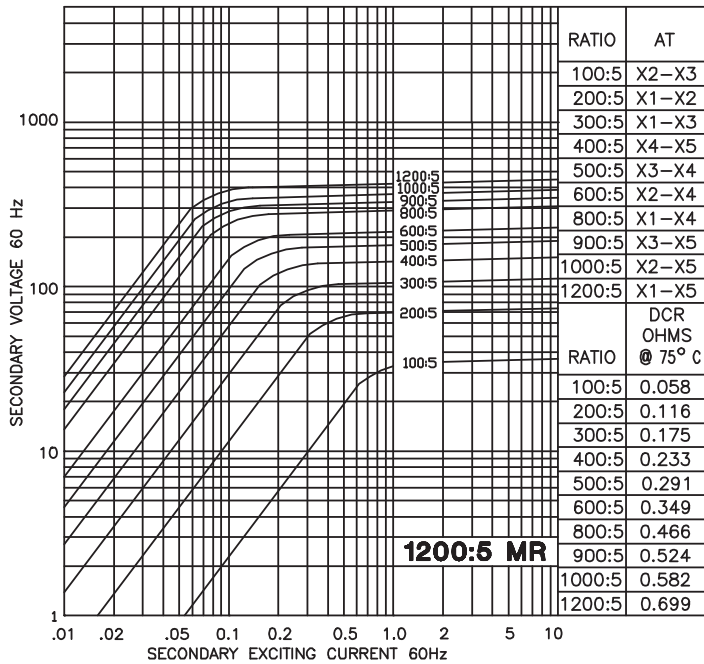


MODEL 786 - 122MR - rating C400

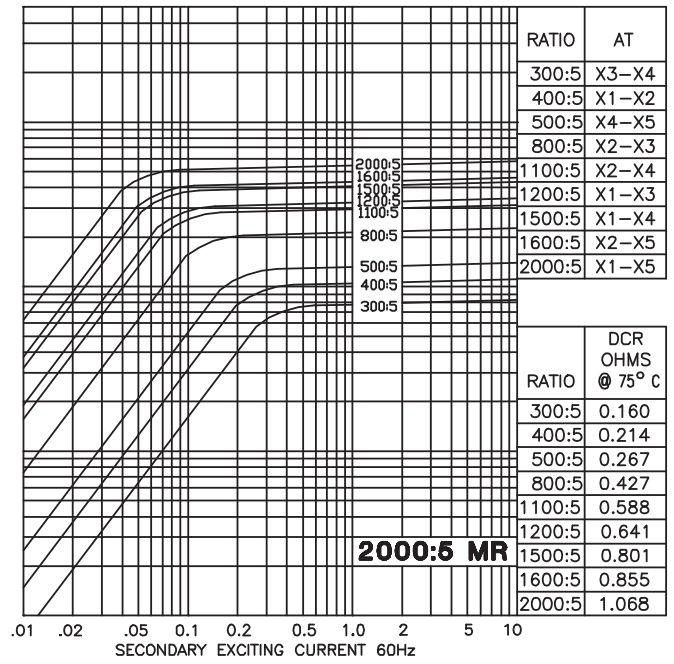

MODEL 786 - 202MR - rating C400

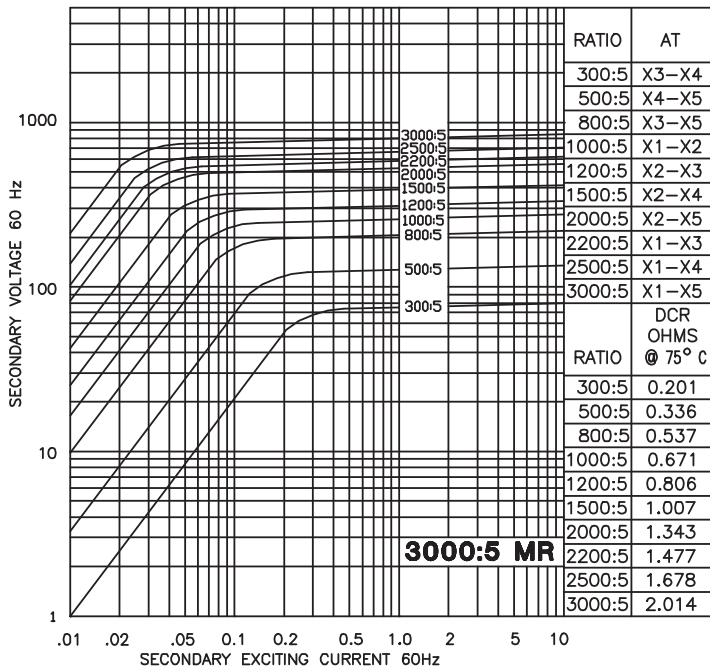

MODEL 786 - 302MR - C400

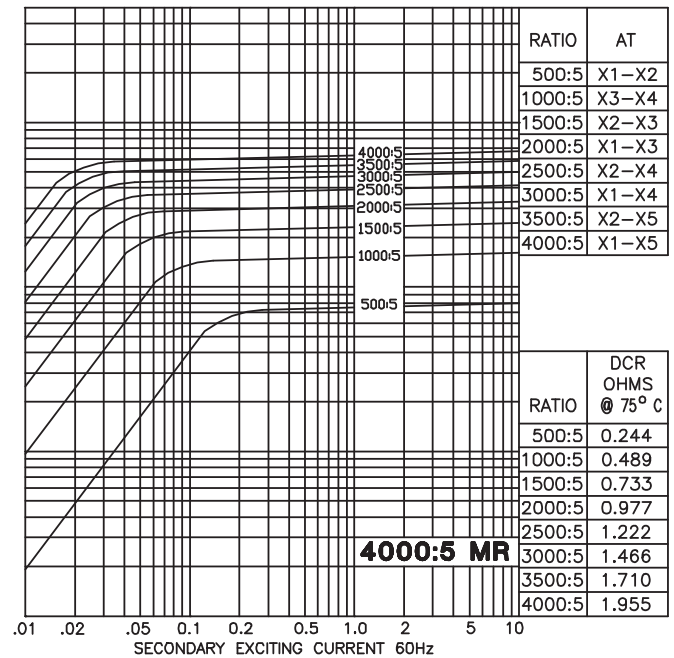

MODEL 786 - 402MR - rating C400